




Pneumatic Vibrators For Concrete Consolidation

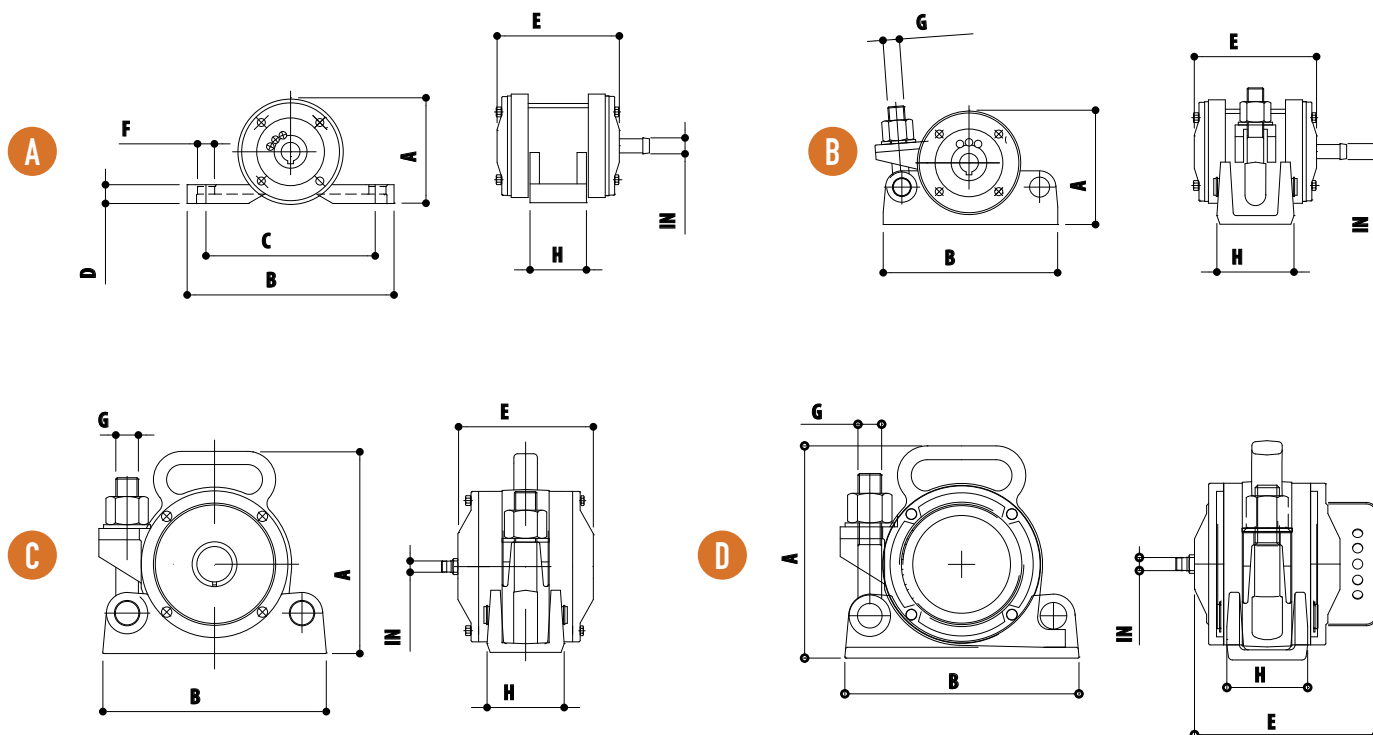

						OVERALL DIMENSIONS										
Model	Working pressure	Vibration	Centr. Force	Air Consump.	Noise Level	Drawing	A	B	C	D	E	F	G	H	IN	Weight
	(bar)	(vpm)	(kg)	l/min	dB (A)		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
HFP 600P	6	17.000	720	1.000	100	A	111	220	180	20	164	20	-	60	15	6.3
HFP 1000P		16.500	1.122	1.100												7.2
HFP 1400P		16.000	1.453	1.200												7.3
HFP 600C	6	17.000	720	1.000	100	B	120	180	-	-	164	-	18	94	15	6.3
HFP 1000C		16.500	1.122	1.100												7.2
HFP 1400C		16.000	1.453	1.200												7.3
HFP 2700C		16.000	2.753	1.600	103	C	224	238	-	-	160	-	24	84	15	14
HFP 4000C		15.200	4.079	1.800												14.5
HFP 6000C		14.500	6.118	1.800												16.3
HFP 4001C	6	10.200	4.079	1.800	90	D	215	240	-	-	180	-	24	84	15	18

PNEUMATIC VIBRATORS FOR CONCRETE CONSOLIDATION

APPLICATION Concrete formworks in situ
Concrete moulds in precast industry

FEATURES

WORKING PRESSURE 6 bar

AIR SUPPLY QUALITY Class 5.4.4

WORKING TEMPERATURE -10°C +60°C

MAX NOISE LEVEL 103 dB(A)
Silent version HFC 4001C: 90 dB(A) at 1 meter distance

TECHNOLOGY Eccentric rotor

MATERIALS Steel and cast iron

ACCESSORIES Fixing tools:
CLW (Clamp for Wooden formworks);
CLS (Clamp for Steel formworks);
CRS (Cradle for Steel concrete moulds)

