

Waste Water Treatment

Hydraulic Compactors CHP

22



Description ▼

Hydraulic Compactors CHP are composed of a compaction zone equipped with a hydraulic ram, a hydraulic gear case, and a compacting pipe.

Screenings fall into the compactor hopper. The hydraulic ram dehydrates the screenings pushing them into the compacting pipe where they are pressed again before being conveyed to the outlet. The liquid from dehydration is drained in the bottom part of the compactor.

Application ▼



Benefits ▼

- ✓ Volume reduction of up to 60%;
- ✓ Low running and maintenance costs;
- ✓ Small footprint.



Available from:
FILQUIP Pty Limited

5/126 Compton Rd, Underwood,
QLD 4119 Australia

Ph: +61 7 3208 3499 Fx: +61 7 3208 3449

Email: sales@filquip.com.au

www.filquip.com.au

Waste Water Treatment


Hydraulic Compactors CHP



Technical Features / Performance

- ▶ 2 sizes
- ▶ From 1.5 up to 3.5 m³/h screenings
- ▶ Manufactured from carbon steel hot dip galvanized/ 304 L / 316 L SS
- ▶ Inlet hopper in different sizes (option)
- ▶ Compacting pipe in different lengths and installation angles (option)
- ▶ Control panel (option)

Overall Dimensions

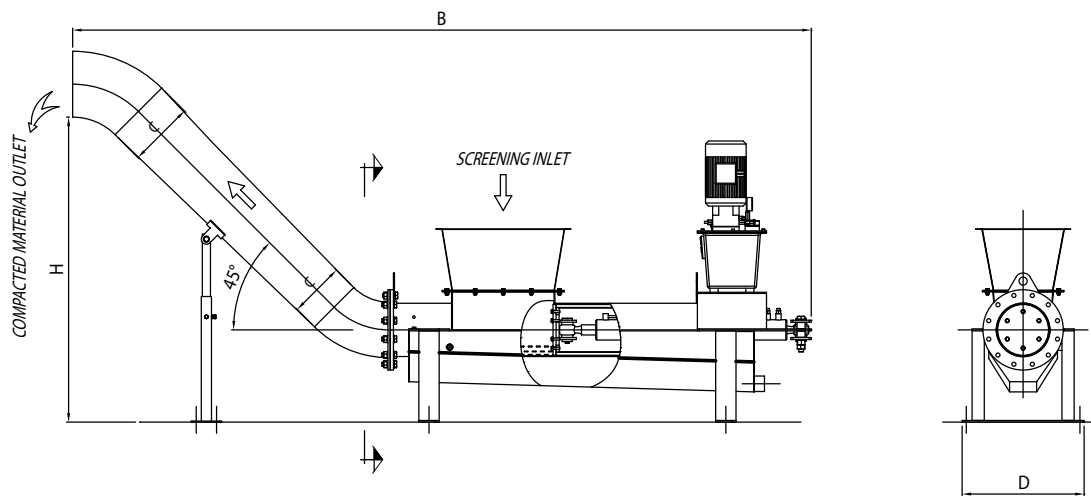

HYDRAULIC COMPACTOR CHP		
Technical Features	CHP 200	CHP 250
NOMINAL DIAMETER - mm	DN 200	DN 250
COMPACTION PIPE C - DN	DN 200 / DN 250	DN 250 / DN 300
HYDRAULIC PISTON - mm	70 / 40	80 / 50
PRESSURE - bar	80 / 120	80 / 120
TOTAL LENGTH B - mm	3545	3635
TOTAL WIDTH D - mm	560	600
DISCHARGE HEIGHT H - mm	1500	1500
SCREENINGS INLET - mm	600 X 400	600 X 400
COMPACTION DEGREE - %	60%	60%
FLOW RATE - m ³ /h	1.5	2.5
INSTALLED POWER - kW	2.2	3.0
PROTECTION	IP 55	IP 55



Available from:
FILQUIP Pty Limited

5/126 Compton Rd, Underwood,
Qld 4119 Australia

Ph: +61 7 3208 3499 Fx: +61 7 3208 3449

Email: sales@filquip.com.au

www.filquip.com.au