




OLI

CM – Frequency and voltage converters

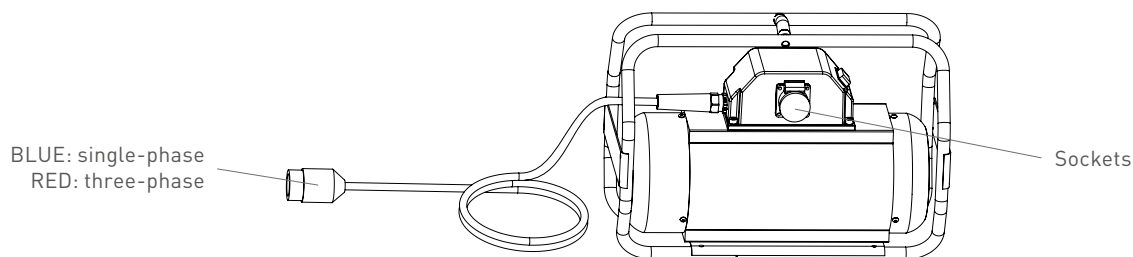

MODEL	FRAME	OUTLETS	SUPPLY ELECTRIC CABLE	WEIGHT	INPUT			OUTPUT		
					VOLTAGE	CURRENT	POWER	VOLTAGE	CURRENT	POWER
	Type	N°	m	kg	V	A	kW	Frequency	A	kVA
CMM 15	Handle	1	3.5	25	230V, 1ph, 50Hz	6	1.1	42V ± 10% 3ph 200Hz	14	1.0
CMM 25	Frame	2	3.5	34		10	1.8		25	1.8
CMT 25	Frame	2	3.5	33		5	2.8		25	1.8
CMT 35	Wheeled	3	5.0	41	400V 3ph 50Hz	6	3.3		36	2.6
CMT 55	Wheeled	3	5.0	50		9	5.0		55	4.0
CMT 85	Wheeled	4	5.0	56		12	6.6		85	6.2

COMPATIBILITY TABLE (maximum number of vibrators that can be connected)						
CMM 15	1x VHN 38	1x VHN 50	1x VHN 59	-	-	-
CMM 25	2x VHN 38	2x VHN 50	2x VHN 59	1x VHP 50	1x VHP 59	1x VHP 65
CMT 25	2x VHN 38	2x VHN 50	2x VHN 59	1x VHP 50	1x VHP 59	1x VHP 65
CMT 35	3x VHN 38	3x VHN 50	3x VHN 59	2x VHP 50	2x VHP 59	1x VHP 65
CMT 55	3x VHN 38	3x VHN 50	3x VHN 59	3x VHP 50	3x VHP 59	2x VHP 65
CMT 85	4x VHN 38	4x VHN 50	4x VHN 59	4x VHP 50	4x VHP 59	3x VHP 65

CM - FREQUENCY AND VOLTAGE CONVERTERS

APPLICATION	Concrete compaction
DESCRIPTION	Frequency and voltage converters equipped with permanent magnets, specifically designed to power high frequency concrete vibrators continuously

FEATURES

DUTY CYCLE	Continuous S1
INSULATION CLASS	F (T° Max = 155 °C)
PROTECTION	Overload protection
WORKING TEMPERATURE	From -20 °C to +40 °C
CONNECTION BOX	Polyamide (nylon + 30% fibre glass), complete with switch and sockets (42V three phase, IP44 protection)
SUPPLY CABLE	Neoprene electric cable H07RN-F with plug
FINISHING	Powder coating (body yellow Ral 1007; fan covers, wheels and frame black Ral 9007)
CERTIFICATIONS	Community Directives and subsequent modifications: 2006/42/EC - 2006/95/EC Conformity verified according to the standard documents IEC 60034-1, IEC 60745-1, UNI EN ISO 12100
MORE	Smooth and robust cast aluminium body Forced ventilation

Available from:
FILQUIP Pty Limited

5/126 Compton Rd, Underwood,
Qld 4119 Australia
Ph: +61 7 3208 3499 Fx: +61 7 3208 3449
Email: sales@filquip.com.au
www.filquip.com.au