




OLI

# EWO – High frequency internal vibrators with built-in converter

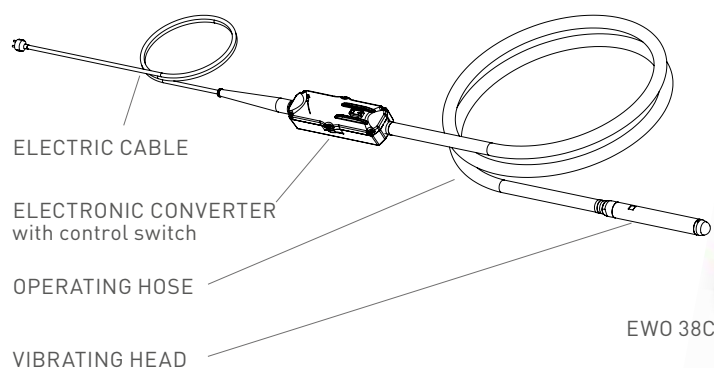

EWO 50C  
EWO 59C  
EWO 65C

EWO 38C



MODEL	HEAD DIAMETER	HEAD LENGTH	HEAD WEIGHT	TOTAL WEIGHT*	CF	RATED CURRENT **	RATED POWER (230V)	ACTION DIAMETER ***	AMPLITUDE	NOISE LEVEL ****	COMPACTION POWER ***
	mm	mm	kg	kg	N	A	kW	cm	mm	DB A	m3/h
EWO 38C	38	404	2.4	14.5	1,700	1.5	0.5	45	1.8	70	20
EWO 50C	50	468	5.2	20.0	3,760	2.7	0.9	70	2.1	76	40
EWO 59C	59	499	8.2	22.8	5,640	3.0	1.1	90	2.4	79	45
EWO 65C	65	484	9.4	24.8	7,330	4.5	1.3	110	2.6	79	50

\* Packaging included

\*\* Refer to centrifugal force for amperage assessment

\*\*\* Measurements vary according to concrete quality and thickness

\*\*\*\* Measured at 1 mt distance

	Input Voltage	Input Frequency	Input Amperage
Converter	230V +10% -15% 1ph	50/60Hz ± 5%	5.5 A
Converter	115V +10% -15% 1ph	50/60Hz ± 5%	11.0 A

## EWO - HIGH FREQUENCY INTERNAL VIBRATORS WITH BUILT-IN CONVERTER

APPLICATION	Concrete compaction
DESCRIPTION	Equipped with compact electronic frequency converters integrated into the supply cable, characterised by high centrifugal forces, constant speeds and high wear resistance

## FEATURES

DUTY CYCLE	Continuous S1
INPUT	230V + 10% - 15% 50/60 Hz - 1 ph
NOMINAL FREQUENCY	12.000 vpm
INSULATION CLASS	F (T° max = 155 °C)
PROTECTION CLASS	Head protection IP68 Converter protection IP66 The inverter is protected against overload, overvoltage, excess temperature and short circuit. A LED light shows the presence of a fault
WORKING TEMPERATURE	From -20 °C to +40 °C
HEAD	Equipped with 4 ball bearings greased for life Hardening treatment (EWO 38C), chrome plating (EWO 50C, EWO 59C, EWO 65C)
SWITCH BUILT-IN	Complete with reinforced gasket
PROTECTION HOSE	5 m SBR rubber hose with textile reinforcement
SUPPLY CABLE	10 m neoprene electric cable H07RN-F with SCHUKO 220V 2P+1T 16A plug
CONVERTER	Sturdy cast aluminium box Ergonomic and lightweight (3 Kg)
INVERTER	Tropicalised and protected against vibration, moisture and shocks with a special resin
FINISHING	Painted yellow RAL 1007 (EWO 38C) and chrome plating (EWO 50C - EWO 59C - EWO 65C)
CERTIFICATIONS	Community Directives and subsequent modifications: 2006/42/EC, 2014/30/EU, 2006/95/EC Conformity verified according to the standard documents IEC 60745-1, IEC 60745-2-12, UNI EN ISO 12100
OPTIONS	Rubber cap

Available from:

**FILQUIP Pty Limited**

5/126 Compton Rd, Underwood,

Qld 4119 Australia

Ph: +61 7 3208 3499 Fx: +61 7 3208 3449

Email: sales@filquip.com.au

www.filquip.com.au