




OLI

# Pneumatic vibrators

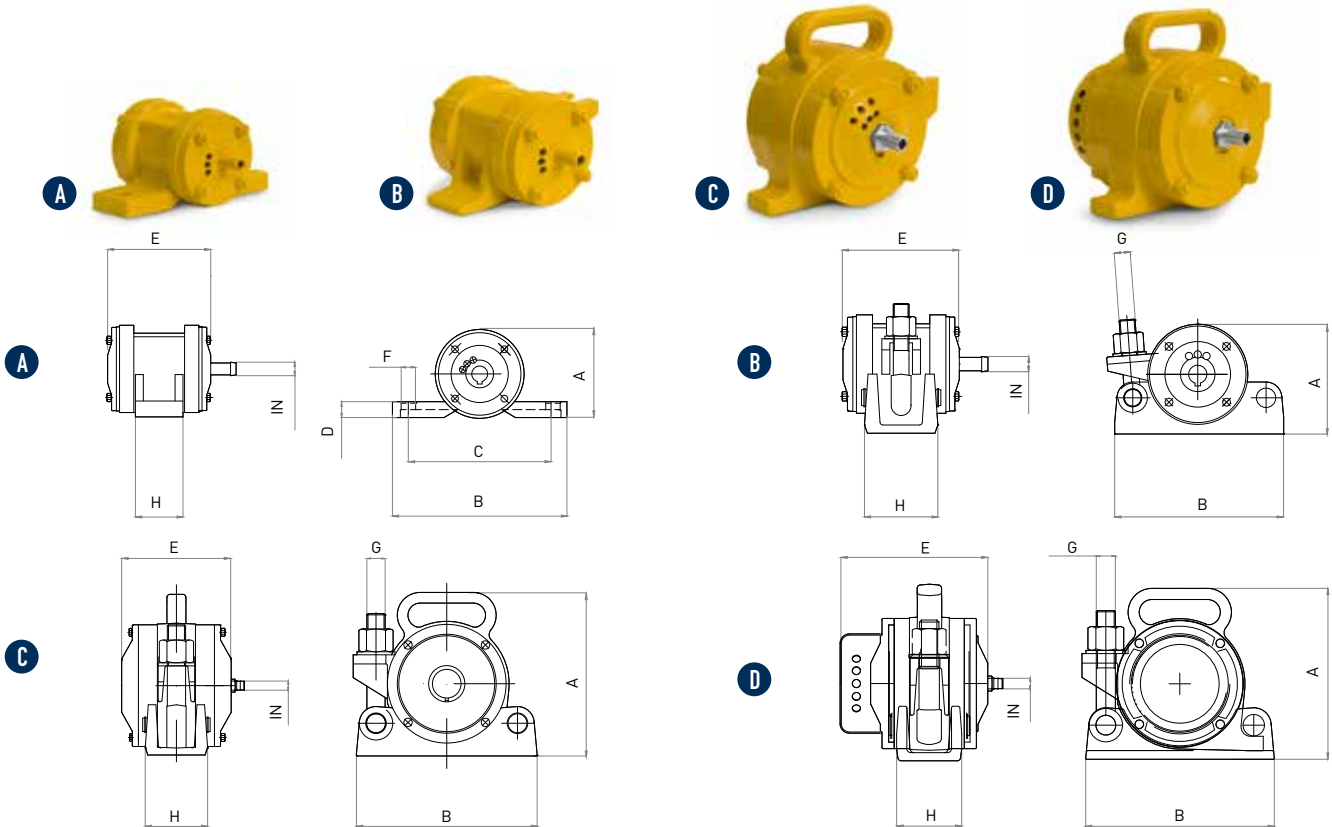

## OVERALL DIMENSIONS

MODEL	WORKING PRESSURE	VIBRATION	CENTR. FORCE	AIR CONSUMP.	NOISE LEVEL*	DRAWING	A	B	C	D	E	F	G	H	IN	WEIGHT
	bar	vpm	kg	l/min	dB [A]		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
HFP 600P	6	17,000	720	1,000	100	A	111	220	180	20	164	20	-	60	15	6.3
HFP 1000P	6	16,500	1,122	1,100	100		111	220	180	20	164	20	-	60	15	7.2
HFP 1400P	6	16,000	1,453	1,200	100		111	220	180	20	164	20	-	60	15	7.3
HFP 600C	6	17,000	720	1,000	100	B	120	180	-	-	164	-	18	94	15	6.3
HFP 1000C	6	16,500	1,122	1,100	100		120	180	-	-	164	-	18	94	15	7.2
HFP 1400C	6	16,000	1,453	1,200	100		120	180	-	-	164	-	18	94	15	7.3
HFP 2700C	6	16,000	2,753	1,600	103	C	224	235	-	-	160	-	24	84	15	14.0
HFP 4000C	6	15,200	4,079	1,800	103		224	235	-	-	160	-	24	84	15	14.5
HFP 4500C	6	8,500	4,587	1,800	103		224	238	-	-	160	-	24	84	15	17.6
HFP 6000C	6	14,500	6,118	1,800	103		224	235	-	-	160	-	24	84	15	16.3
HFP 4001C*	6	10,200	4,079	1,800	90	D	215	235	-	-	180	-	24	84	15	18.0

\* Silent model; measured at 1 mt distance

## PNEUMATIC VIBRATORS FOR CONCRETE CONSOLIDATION

APPLICATION Concrete formworks on site  
Concrete moulds in precast industry

### FEATURES

WORKING PRESSURE 6 bar

AIR SUPPLY QUALITY Class 5.4.4

WORKING TEMPERATURE -10 °C / +60 °C

MAX NOISE LEVEL 103 dB(A)  
Silent version HFC 4001C: 90 dB(A) at 1 meter distance

TECHNOLOGY Eccentric rotor

MATERIALS Steel and cast iron

FINISHING Painted yellow RAL 1007



Available from:

**FILQUIP Pty Limited**

5/126 Compton Rd, Underwood,

Qld 4119 Australia

Ph: +61 7 3208 3499 Fx: +61 7 3208 3449

Email: sales@filquip.com.au

www.filquip.com.au