


# High Flow Rate FIBC Dischargers

## SBB-HFF

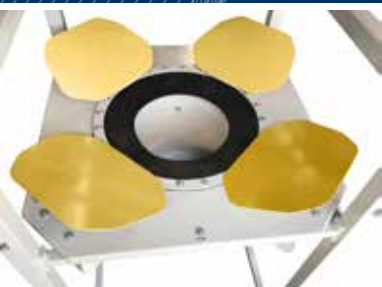

# EASY, CLEAN AND SAFE FIBC DISCHARGING


The SBB-HFF-type FIBC Discharger is the ideal stationary solution for efficient FIBC discharging. Its design guarantees safe and handy loading, unloading and FIBC opening. The innovative petal-type flow aid system allows total or partial discharging of the material granting unparalleled efficiency and cost-saving operation even with materials difficult to discharge.

The FIBC loading interface is the core of a system designed to offer easy and safe access while connecting the FIBC outlet valve. This interface allows dust-proof sealing, thus avoiding product leaks and contamination.

The SBB-HFF-type FIBC Discharger with loading interface is **essential for a healthy, clean and safe indoor work environment**.

## S-MODEL

for loading by forklift-truck

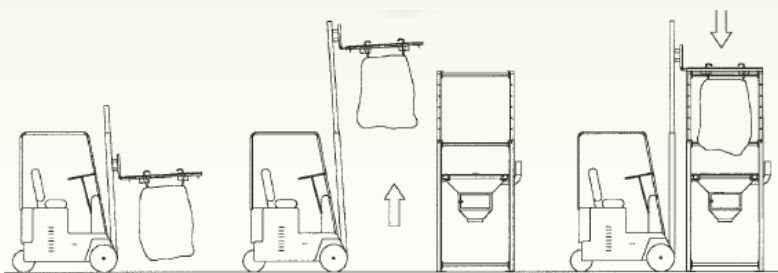

## C-MODEL

for loading by crane



## M-MODEL

for loading by hoist




## Overall Dimensions


CODE	OUTLET Ø mm	MAX. HEIGHT mm	WIDTH mm	MAX. FIBC DIMENSIONS mm	MAX. FIBC HEIGHT mm	MAX. FIBC WEIGHT kg
SBB-HFF C	273	1,930	1,410	1,000 x 1,000	unlimited	2,000
SBB-HFF S	273	3,490	1,410	1,000 x 1,000	2,000	
SBB-HFF M	273	4,810	1,580	1,000 x 1,000	2,000	

## Features

- Modular design, easily adaptable to different bulk solids, FIBC weights and sizes
- Electric motovibrator as material discharge aid
- Innovative emptying system tailored for different material characteristics

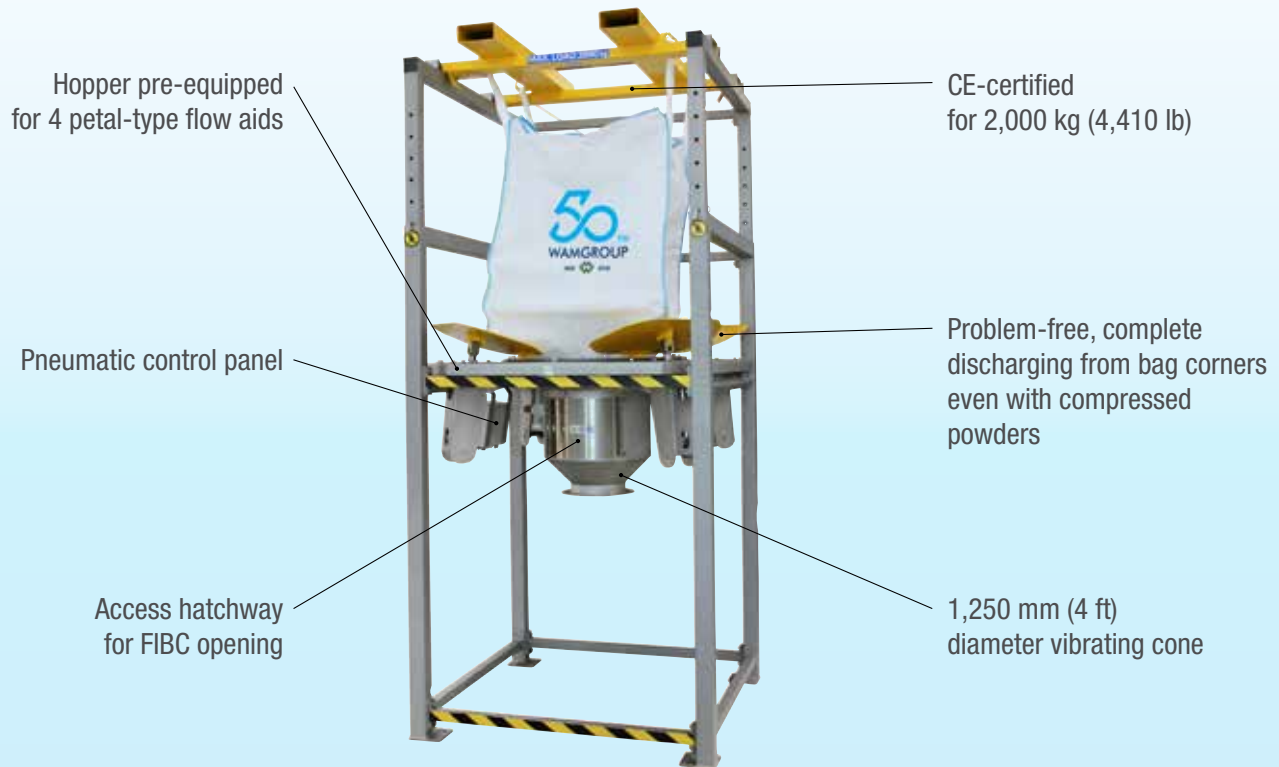

## Benefits



**Internal footprint (no protruding parts) allowing optimised battery configuration**



**Easily adaptable to a wide range of materials, different FIBC sizes and weights**



**No labour required for complete FIBC emptying**



**Large-scale industrial production ensuring attractively priced high-quality product**



**Full pre-equipment allowing subsequent retrofitting of any accessory**

## Accessories



**LUMP BREAKING FEEDER VALVE**  
aiding material flow



**ELECTRONIC CONTROL PANEL**  
individually programmable according to specific material properties



**CUTTING KIT**  
3-blade configuration enhancing cutting performance




# Application



## MECHANICAL FEEDING & CONVEYING



## PNEUMATIC CONVEYING

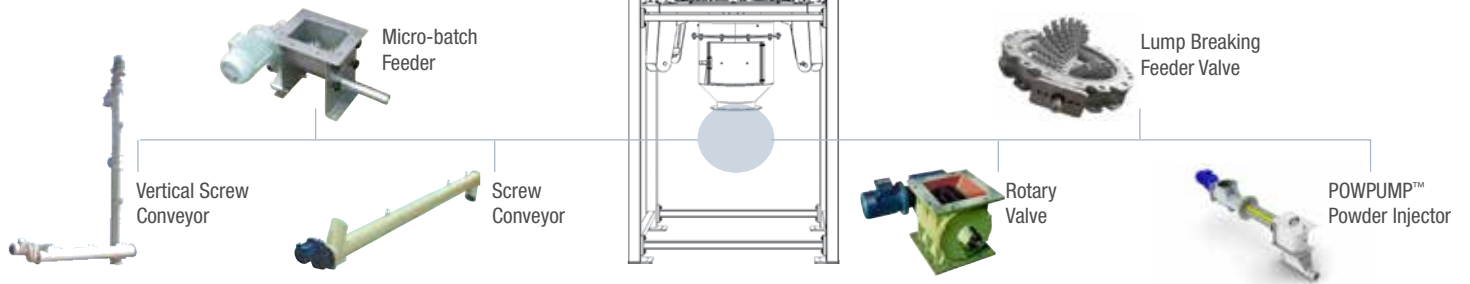

Available from:  
**FILQUIP Pty Limited**

5/126 Compton Rd  
Underwood Qld 4119  
Australia  
Phone: +61 7 3208 3499  
Fax: +61 7 3208 3449  
Email: sales@filquip.com.au  
www.filquip.com.au



UNI EN ISO 9001  
Certified Company

[www.wamgroup.com](http://www.wamgroup.com)