


FOR PNEUMATIC CONVEYING (LEAN OR DENSE PHASE) VACUUM OR PRESSURE SYSTEMS

M Series

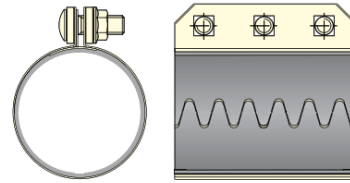

Specification of Stock Coupling

- Outside skin in stainless steel 430
- Gasket cover in stainless steel 430
- Black SBR gasket $-30^{\circ}\text{C}/+80^{\circ}\text{C}$
- Zinc plated bolts
- Stainless steel 304, conductivity strip

Coupling Options *

- All stainless steel 304 version
- White NBR gasket non-FDA $-20^{\circ}\text{C}/+110^{\circ}\text{C}$
- White NBR gasket FDA $-20^{\circ}\text{C}/+110^{\circ}\text{C}$
- Black SBR gasket $-30^{\circ}\text{C}/+80^{\circ}\text{C}$
- Silicone VMQ gasket $-60^{\circ}\text{C}/+200^{\circ}\text{C}$
- Viton FPM gasket $-20^{\circ}\text{C}/+250^{\circ}\text{C}$
- Conductive protection ring in stainless steel 304

L

Ø

150 mm

38.1 <> 114.3 mm


Bolts

Req. Bolt Torque

M8

20Nm

HL Series

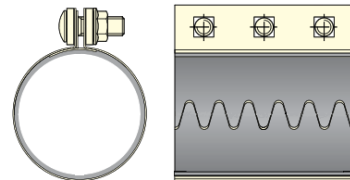

Specification of Stock Coupling

- Outside skin in galvanised steel
- Gasket cover in galvanised steel
- White NBR gasket Non-FDA $-20^{\circ}\text{C}/+110^{\circ}\text{C}$
- Zinc plated bolts
- Stainless steel 304, conductivity strip
- Conductive protection ring in stainless steel 304

Coupling Options *

- All stainless steel 304 version
- White NBR gasket FDA $-20^{\circ}\text{C}/+110^{\circ}\text{C}$
- Black SBR gasket $-30^{\circ}\text{C}/+80^{\circ}\text{C}$
- Silicone VMQ gasket $-60^{\circ}\text{C}/+200^{\circ}\text{C}$
- Viton FPM gasket $-20^{\circ}\text{C}/+250^{\circ}\text{C}$

L

Ø

150 <> 200 mm

38.1 <> 300 mm

Bolts


Req. Bolt Torque

M10 < Ø 88.9, M12 ≥ Ø 88.9

M10: 47Nm, M12: 60Nm

* OPTIONS

Coupling with clamp and side bars



Borosilicate Glass Tubing - Bends



Coupling for different diameters



Borosilicate Glass Tubing – Straights



Glass bends and straights are complete with copper earthing strips

* Ask us about other available options



+61 7 3208 3499
sales@filquip.com.au
www.filquip.com.au

Specialists in material handling equipment for powders and granules

Eurac Couplings & Tubes 220819