

Vertical Long-Shaft Chopper Pumps with Electric Motor VPH

Available from:

FILQUIP PTY LIMITED

24 Smallwood Street

Underwood, Qld 4119, Australia

Ph: +61 7 3208 3499 sales@filquip.com.au

www.filquip.com.au



SAVECO
A WAMGROUP® Brand



ROBUST, DURABLE, VERSATILE

CHIOR® VPH is a Vertical Chopper Pump with external motor drive designed to chop up and lift any kind of livestock slurry, biogas digestate, as well as civil or industrial effluents.

CHIOR® VPH Long-Shaft Cutting Pumps with top suction and triple chopping tool excel through their high pumping capacity and cutting efficiency even under harsh working conditions. The design of the pump housing made of cast iron or stainless steel enables a wide range of possible applications.

The electric motor rotates the suction screw via the drive shaft. The chopping system enables shredding of coarse matter. The shredded material is conveyed out of the tank or pit through the stainless-steel delivery pipe. The MX-version conveys the material into the tank through a special mixing nozzle.

Overall Dimensions

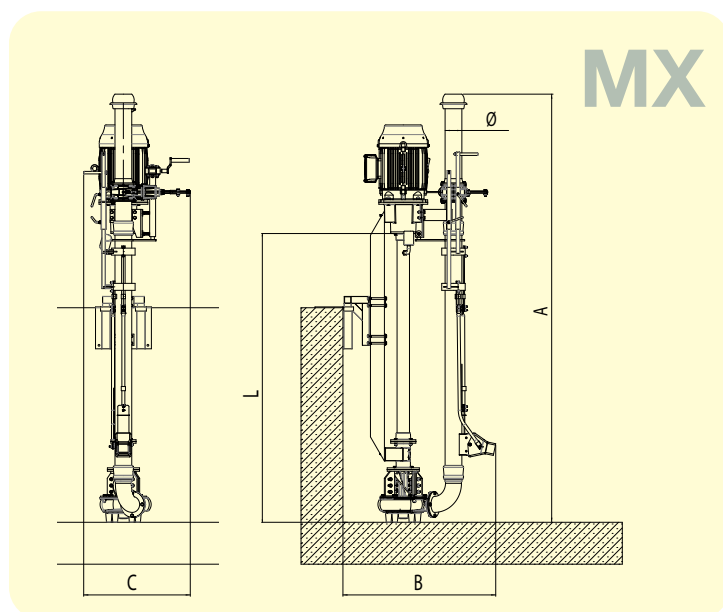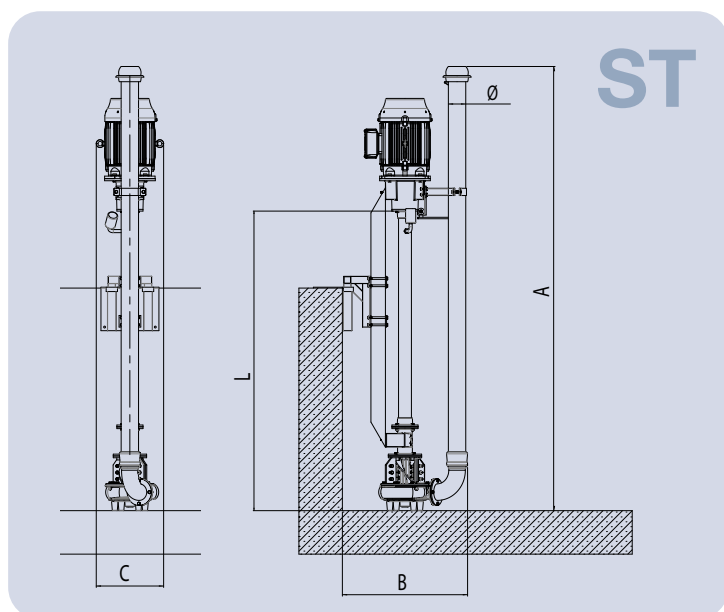

MODEL	Drive Power (kW)	Pipe Ø (mm)	Pump Length L (m)							B (mm)	C (mm)	B (mm)	C (mm)
			2.5	3.0	3.5	4.0	4.5	5.0	5.5				
			A (mm)										
VPH 075	7.5	100	3,330	3,830	4,330	4,830	5,330	5,830	6,330	750	360	950	800
VPH 110	11.0	100	3,530	4,030	4,530	5,030	5,530	6,030	6,530	750	430	950	800
VPH 110	11.0	120	3,570	4,070	4,570	5,070	5,570	6,070	6,570	860	480	1,100	800
VPH 150	15.0	120	3,570	4,070	4,570	5,070	5,570	6,070	6,570	860	480	1,100	800
VPH 185	18.5	120	3,570	4,070	4,570	5,070	5,570	6,070	6,570	860	480	1,100	800
VPH 220	22.0	120	3,570	4,070	4,570	5,070	5,570	6,070	6,570	860	480	1,100	800


Dimensions in mm

Benefits

- ✓ **High-efficiency, low-energy consumption electric motor**
- ✓ **High lifting efficiency thanks to top suction system**
- ✓ **Efficient chopping system that prevents clogging**
- ✓ **Anti-leakage design**
- ✓ **Wide range suitable for different tank depths**
- ✓ **Chopping system available in stainless steel for minimum corrosion and extended durability**
- ✓ **Practical and effective mixing system (MX-version)**

Technical Features

- IE3 motor (Premium Efficiency)
- 3-phase, 4-pole electric motor with IP55 protection
- Stainless-steel frame (transmission pole and delivery pipe)
- Torsional elastic coupling between motor and transmission shaft
- Oil-bearing drive unit
- Modular drive shaft delivers higher resistance to mechanical stress reducing vibrations

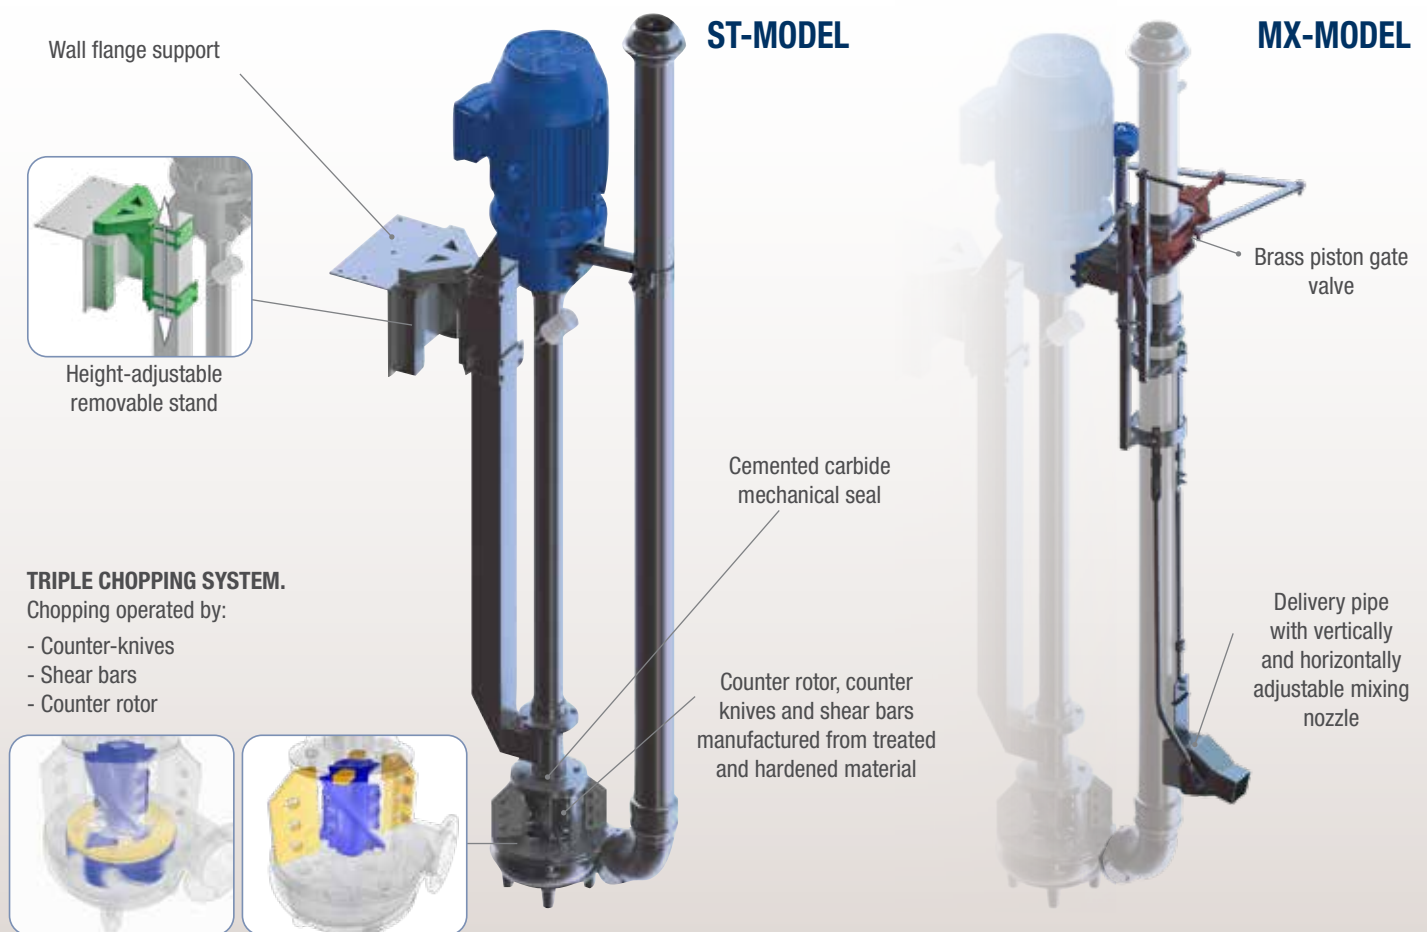

Accessories




Stainless-steel electric motor rain cover



Anchor bracket for wall support

Product range performance

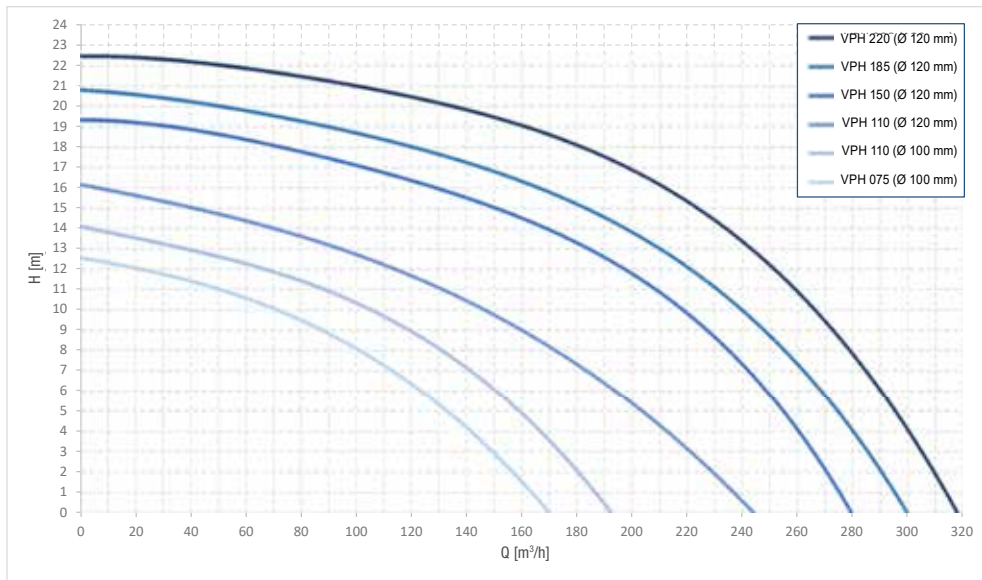

* Values measured with clear water at 20 °C.

Results may vary by changing the operating conditions depending on the flow rate, density and viscosity of the liquid, the type and dry matter content of the manure (depending on type of animal feed), the height and distance of the support stand as well as the diameter of the pipe.

Application



Available from:

FILQUIP PTY LIMITED

24 Smallwood Street

Underwood, Qld 4119, Australia

Ph: +61 7 3208 3499 sales@filquip.com.au

www.filquip.com.au

